



*An Online PDH Course  
brought to you by  
CEDengineering.com*

# **Introduction to Acoustic Modeling and Simulation for Architects and Engineers**

Course No: A02-014

Credit: 2 PDH

---

Amr Abouseif, PMP<sup>®</sup>, LEED AP<sup>®</sup> BD+C.

---



Continuing Education and Development, Inc.

P: (877) 322-5800

[info@cedengineering.com](mailto:info@cedengineering.com)

## **Table of Contents**

<b>1. Introduction .....</b>	<b>1</b>
1.1 The Role of Acoustics in Modern Building Design .....	1
1.2 Why Acoustic Modelling Matters .....	1
<b>2. Understanding Sound Behaviour in Buildings .....</b>	<b>2</b>
2.1 Basic Acoustic Principles for Design Professionals.....	2
2.2 From Theory to Practice .....	3
<b>3. Introduction to Acoustic Modelling.....</b>	<b>6</b>
3.1 Fundamentals of Digital Acoustic Simulation.....	6
Types of Acoustic Models.....	6
Model Selection Criteria.....	10
3.2 Building Your First Acoustic Model .....	11
<b>4. Practical Applications .....</b>	<b>14</b>
4.1 Common Building Types and Their Acoustic Needs .....	14
<b>5. Integration with Design Workflow .....</b>	<b>14</b>
5.1 Incorporating Acoustic Modelling in Project Phases .....	14
5.2 Communication and Documentation .....	15
<b>6. Case Studies in Acoustic Design for University Lecture Halls.....</b>	<b>16</b>
6.1 Case Study 1: Integration of Acoustic Design in New Construction .....	16
6.2 Case Study 2: Acoustic Renovation of Existing Lecture Halls .....	17
6.3 Lessons for Future Projects .....	19
<b>7. Future Trends and Technologies .....</b>	<b>19</b>
<b>8. Conclusions and Future Directions .....</b>	<b>20</b>
<b>References .....</b>	<b>22</b>

## **1. Introduction**

### **1.1 The Role of Acoustics in Modern Building Design**

The acoustic environment of a building significantly influences its occupants' well-being, productivity, and overall satisfaction. In contemporary architecture, acoustic design has evolved from a specialized concern primarily for performance venues to a critical consideration across all building typologies. This evolution reflects growing awareness of the impact of sound on human health and performance, supported by extensive research linking acoustic quality to cognitive function, stress levels, and social interaction.

Modern building projects face increasingly complex acoustic challenges:

- Open-plan offices requiring speech privacy and focused work environments
- Educational spaces supporting both traditional and technology-enhanced learning
- Healthcare facilities balancing communication needs with patient recovery
- Mixed-use developments managing sound transmission between diverse functions
- Sustainable design strategies that must consider acoustic implications

The financial implications of acoustic design decisions are substantial, with poor acoustic performance leading to reduced property values, increased renovation costs, and potential liability issues. Early-stage acoustic consideration through modeling can prevent costly remediation and ensure optimal building performance.

### **1.2 Why Acoustic Modelling Matters**

Computational acoustic modeling has transformed from a specialized tool for acoustic consultants to an essential component of the integrated design process. This transformation reflects both technological advancement and growing recognition of early-stage acoustic analysis's value.

Key benefits of acoustic modeling include:

1. **Risk Mitigation:** Early identification of potential acoustic issues before construction
2. **Cost Optimization:** Evaluation of design alternatives and their cost implications
3. **Performance Verification:** Validation of design solutions against requirements
4. **Stakeholder Communication:** Clear visualization of acoustic concepts for non-technical audiences

## **2. Understanding Sound Behaviour in Buildings**

### **2.1 Basic Acoustic Principles for Design Professionals**


Sound behavior in buildings follows fundamental physical principles that, while complex in their full mathematical expression, can be understood through key concepts relevant to design decisions. The primary mechanisms affecting indoor acoustics include:

**Wave Propagation:** Sound travels as pressure waves through air, with behavior dependent on frequency and wavelength. Understanding this basic principle helps explain why different room geometries and materials affect different frequencies differently.

**Reflection and Absorption:** When sound waves encounter surfaces, they are partially reflected and partially absorbed. The balance between these processes depends on:

- Surface material properties
- Angle of incidence
- Sound frequency
- Surface geometry

**Diffusion:** The scattering of sound waves upon impact with irregular surfaces plays a crucial role in creating balanced acoustic environments. Effective diffusion can help eliminate acoustic defects while maintaining sound energy within a space.

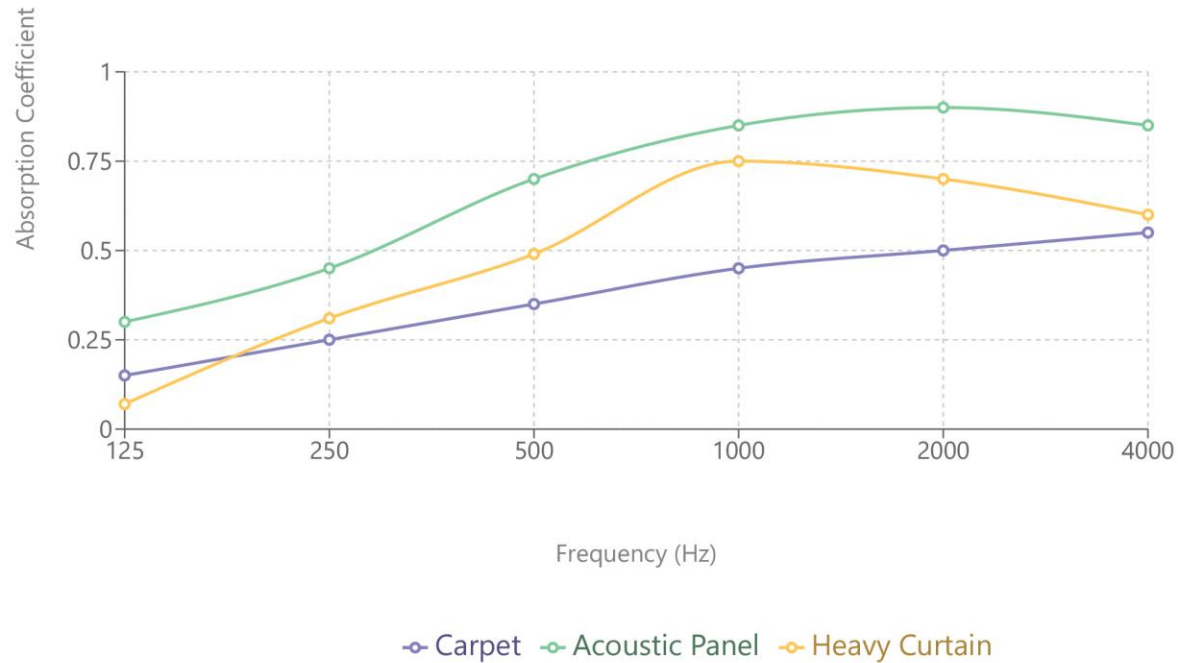

Absorption coefficients of different materials

## 2.2 From Theory to Practice

Translating acoustic principles into practical design decisions requires understanding both the theoretical foundations and their real-world implications. Key considerations include:

### Material Selection

**Absorption Coefficients Across Frequency Ranges:** Understanding how different materials absorb sound at various frequencies is crucial for achieving balanced acoustic performance. For example, porous materials like acoustic foam typically perform well at high frequencies, while membrane absorbers are more effective at low frequencies. Designers must consider the full frequency spectrum when selecting materials to ensure appropriate acoustic control across all relevant frequencies.

**Cost-Benefit Analysis of Acoustic Treatments:** Acoustic treatments vary significantly in both initial cost and long-term value. While premium acoustic panels may offer superior performance, more affordable solutions such as strategically placed fabric-wrapped insulation might provide

acceptable results for certain applications. The analysis must consider not only material costs but also installation complexity, potential energy savings from improved acoustic insulation, and impact on occupant productivity.

**Integration with Other Building Systems:** Acoustic materials must work harmoniously with lighting, HVAC, fire suppression, and other building systems. For instance, acoustic ceiling treatments need to accommodate light fixtures and sprinkler heads while maintaining their sound-absorbing properties. This integration requires careful coordination during both design and installation phases to ensure all systems function effectively without compromising acoustic performance.

**Durability and Maintenance Requirements:** Long-term performance of acoustic treatments depends heavily on their durability and ease of maintenance. Materials must resist deterioration from humidity, UV exposure, and physical contact while remaining cleanable and replaceable when necessary. For example, acoustic panels in high-traffic areas should have robust facing materials and easily replaceable components to maintain their effectiveness over time.

### *Space Planning*

**Room Proportions and Modal Response:** The dimensional ratios of a room significantly influence its acoustic behavior, particularly in terms of standing waves and modal distribution. Optimal room proportions (such as the classic 2:3:5 ratio) help prevent problematic modal clustering and ensure more even sound distribution. This consideration is especially critical in music rooms, recording studios, and performance spaces where low-frequency response is crucial.

**Positioning of Sound Sources and Receivers:** Strategic placement of sound sources (speakers, performers) and receivers (audience, microphones) can dramatically impact acoustic performance. Key factors include:

- Direct sound path optimization
- Early reflection control
- Minimization of unwanted echoes


- Uniform sound coverage throughout the listening area

**Circulation Patterns and Acoustic Zoning:** Effective acoustic design requires careful consideration of how people move through spaces and how different acoustic zones interact. This includes:

- Creating acoustic buffers between noisy and quiet areas
- Managing sound transmission along corridors
- Designing transition spaces between different acoustic environments
- Considering the impact of door locations and opening patterns

**Buffer Space Requirements:** Adequate spatial separation between acoustically sensitive areas is essential for maintaining appropriate sound isolation. This involves:

- Determining minimum distances between noise sources and sensitive receivers
- Designing appropriate wall assemblies and air gaps
- Planning mechanical room locations and isolation requirements
- Creating sound locks and vestibules where necessary

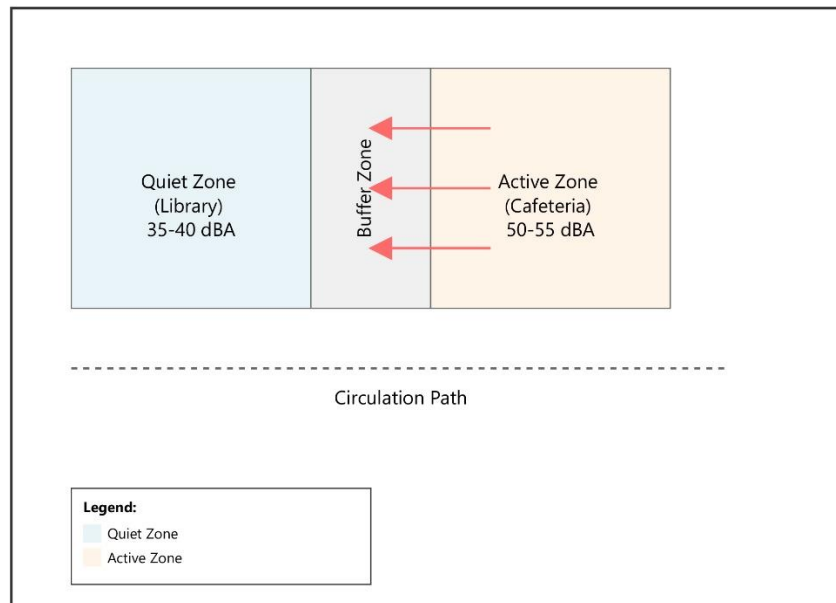

Acoustic zoning and buffer spaces

### **3. Introduction to Acoustic Modelling**

#### **3.1 Fundamentals of Digital Acoustic Simulation**

Digital acoustic simulation has revolutionized how we predict and optimize building acoustics. Understanding the various modeling approaches helps practitioners select appropriate tools for their specific needs.

#### **Types of Acoustic Models**

##### **1. Geometric Acoustics**

**Ray Tracing Methods:** Ray tracing simulates sound propagation by tracking discrete rays as they travel from the source, reflect off surfaces, and reach receivers. Each ray carries energy information and loses strength with distance and surface interactions. This method is particularly effective for:

- High-frequency sound behavior analysis
- Large spaces like concert halls and auditoriums
- Reflection path visualization
- Early reflection studies

**Image Source Modeling:** This technique creates virtual sound sources by mirroring the original source across room boundaries. It excels at:

- Calculating early reflection patterns
- Determining echo locations
- Precise temporal response prediction
- Room geometry optimization: The method becomes computationally intensive with increasing reflection order but provides highly accurate results for early sound field analysis.

**Beam Tracing Algorithms:** Beam tracing extends ray tracing by using pyramidal beams instead of single rays, offering:



- More efficient coverage of the sound field
- Better handling of edge diffraction
- Reduced computation time compared to pure ray tracing
- More accurate energy distribution calculations: This method is particularly valuable for spaces with complex geometries where traditional ray tracing might miss important acoustic paths.

#### **Advantages and Limitations for Different Space Types:**

- Concert Halls: Excellent for analyzing late reflections and overall acoustic character
- Lecture Rooms: Effective for speech intelligibility prediction
- Open Offices: Useful for studying sound propagation across workstations
- Limitations include reduced accuracy at low frequencies and difficulty modeling wave phenomena

## ***2. Wave-Based Methods***

**Finite Element Analysis (FEA):** FEA divides the acoustic space into small elements and solves wave equations for each element. This method provides:

- Highly accurate low-frequency analysis
- Detailed modal behavior prediction
- Precise boundary interaction modeling
- Comprehensive pressure field visualization Best suited for:
- Small to medium-sized rooms
- Critical listening spaces
- Low-frequency problem solving
- Detailed acoustic design validation

**Boundary Element Method (BEM):** BEM models only the boundaries of the acoustic space, reducing computational requirements while maintaining accuracy for:

- Exterior radiation problems

- Sound insulation calculations
- Complex geometry analysis
- Coupling between structural and acoustic elements

**Applications in Low-Frequency Analysis:** Wave-based methods are essential for:

- Room mode calculation
- Bass trap design
- Structural-acoustic coupling
- Sound transmission loss prediction: These methods become computationally prohibitive at higher frequencies but are invaluable for low-frequency acoustic design.


### *3. Statistical Methods*

**Statistical Energy Analysis (SEA):** SEA treats acoustic spaces as systems of coupled subsystems, analyzing energy flow between them. This approach is:

- Ideal for high-frequency analysis
- Effective for large, complex structures
- Computationally efficient
- Suitable for rapid design iterations

Key applications include:

- Building acoustics
- Transportation noise
- Industrial noise control
- Large-scale acoustic planning

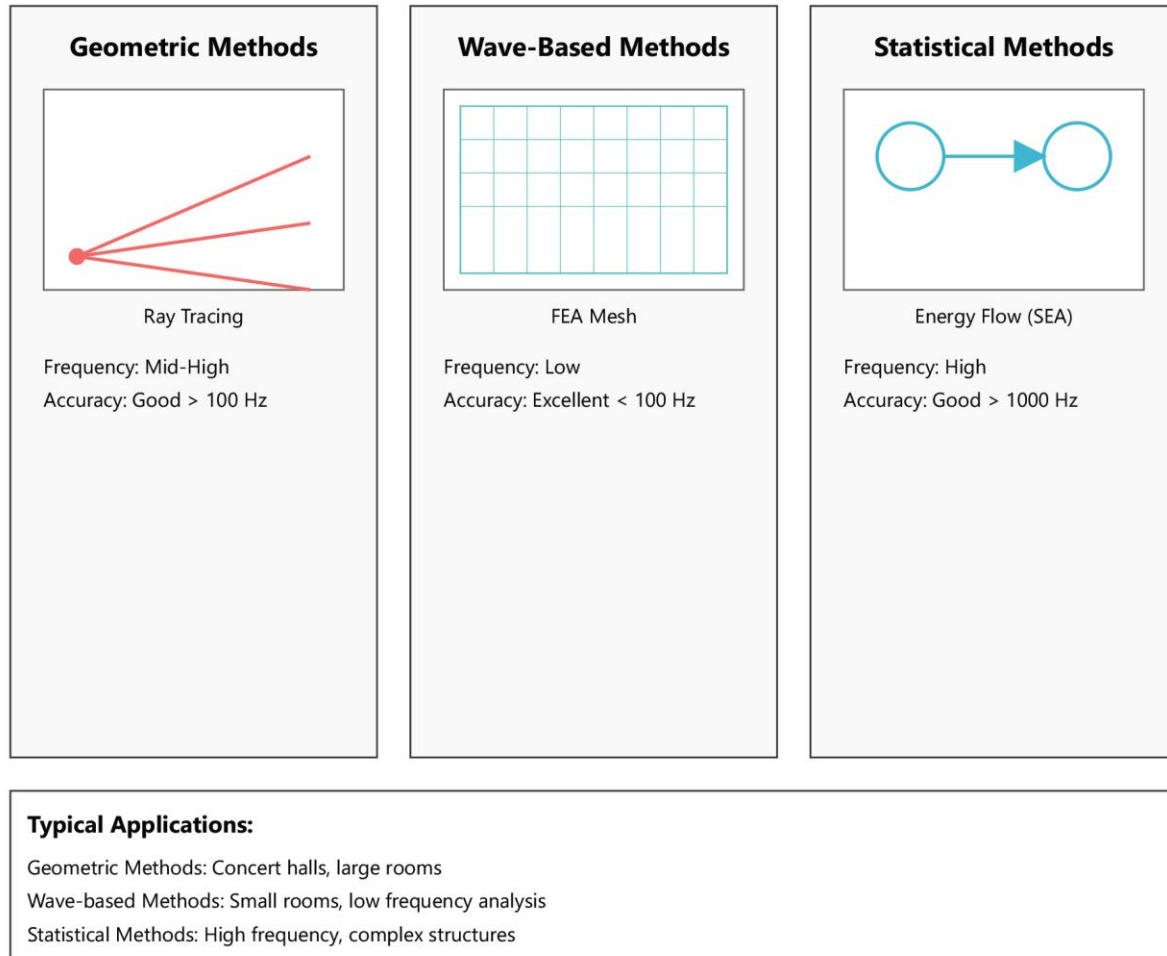

**Hybrid Approaches:** Modern acoustic modeling often combines multiple methods to leverage their respective strengths:

- Low frequencies: Wave-based methods (FEA/BEM)
- Mid frequencies: Geometric methods (Ray tracing/Image source)
- High frequencies: Statistical methods (SEA)

This hybrid approach provides:

- Comprehensive frequency coverage
- Optimized computational efficiency
- Balanced accuracy across the spectrum
- Practical solution for complex projects

### **Model Selection Criteria**

The selection of an appropriate modeling approach requires careful consideration of multiple factors:

#### **Room Size and Complexity:**

- Small rooms ( $<50\text{m}^3$ ): Wave-based methods preferred
- Medium rooms ( $50\text{-}5000\text{m}^3$ ): Geometric methods suitable
- Large rooms ( $>5000\text{m}^3$ ): Statistical or hybrid approaches recommended
- Complex geometries may require multiple modeling approaches

#### **Frequency Range of Interest:**

- Low frequencies ( $<100\text{ Hz}$ ): Wave-based methods
- Mid frequencies ( $100\text{-}1000\text{ Hz}$ ): Geometric methods
- High frequencies ( $>1000\text{ Hz}$ ): Statistical methods Project requirements determine the critical frequency ranges needing analysis.

#### **Required Accuracy:**

- Design stage: Simplified geometric models acceptable
- Final verification: Detailed wave-based analysis needed
- Certification requirements: May dictate specific methods
- Critical spaces: Often require hybrid approaches

### **Computational Resources:**

- Processing power availability
- Memory constraints
- Software licensing considerations
- Time allocation for calculation

### **Project Timeline and Budget:**

- Preliminary design: Rapid geometric methods
- Detailed design: More comprehensive analysis
- Value engineering: Balance of methods
- Post-occupancy verification: Targeted analysis

## **3.2 Building Your First Acoustic Model**

Successful acoustic modeling requires a structured approach and attention to detail. The following workflow has been developed based on industry best practices and research findings.

### **Step 1: Project Setup**

- Define analysis objectives
- Identify critical parameters
- Establish accuracy requirements
- Select appropriate modeling tools

### **Step 2: Geometry Creation**


- Simplify complex forms while maintaining acoustic relevance
- Focus on acoustically significant elements
- Verify model water-tightness
- Include necessary detail levels

### **Step 3: Material Assignment**

- Apply accurate absorption coefficients
- Consider frequency-dependent properties
- Account for surface conditions
- Document assumptions

### **Step 4: Source and Receiver Placement**

- Representative source characteristics
- Strategic receiver locations
- Compliance with measurement standards
- Documentation of positions

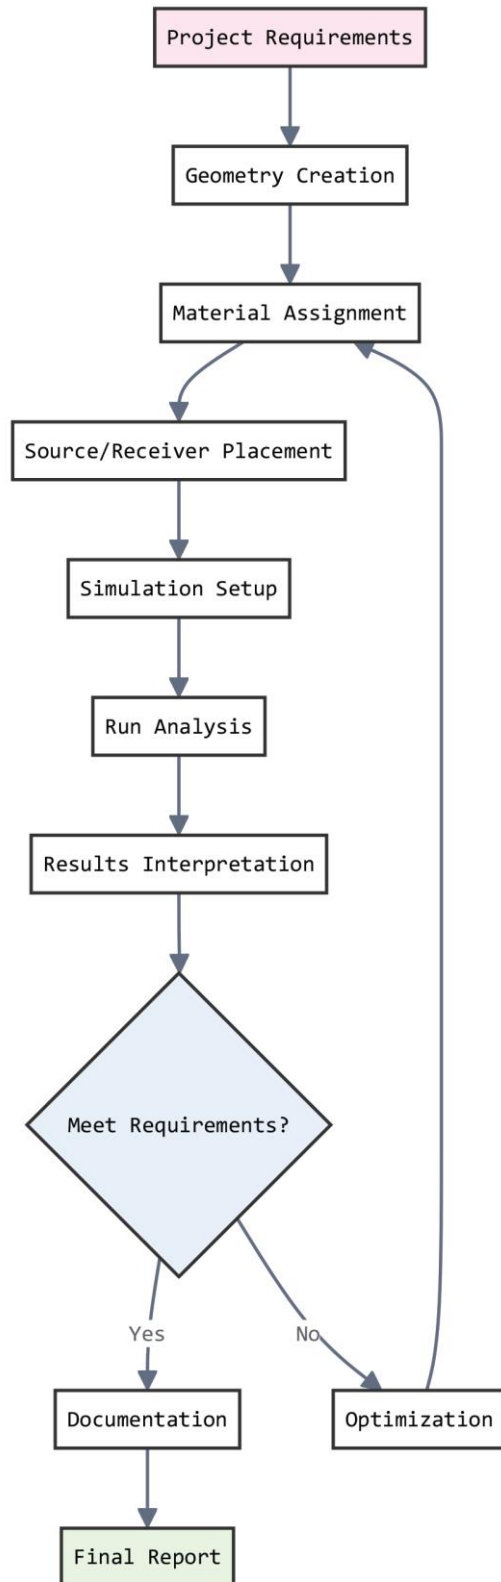

Typical acoustic project simulation workflow

## **4. Practical Applications**

### **4.1 Common Building Types and Their Acoustic Needs**

Different building types present unique acoustic challenges and requirements. Understanding these specifics helps inform modeling approaches and analysis criteria.

#### **Office Spaces:**

- Speech privacy between workstations
- Background noise levels
- Room acoustic parameters for video conferencing
- Impact of mechanical systems

#### **Educational Facilities:**

- Classroom acoustics for optimal learning
- Multi-purpose space flexibility
- Noise control in circulation areas
- Integration with modern teaching technology

## **5. Integration with Design Workflow**

### **5.1 Incorporating Acoustic Modelling in Project Phases**

The integration of acoustic modeling into the design process requires careful coordination and strategic planning across multiple project phases. Each phase presents unique challenges and opportunities for optimizing acoustic performance while maintaining project efficiency.

**Conceptual Design Phase** During the conceptual phase, acoustic considerations must be introduced early to influence fundamental design decisions. Basic room acoustic assessments focus on volumetric studies and preliminary geometry evaluations to establish the acoustic foundation. The material strategy at this stage involves broad-stroke decisions about major surface treatments and their approximate locations. Massing studies incorporate acoustic buffers



and sound isolation strategies, while preliminary cost implications help inform the feasibility of different acoustic approaches.

**Schematic Design** As the project moves into schematic design, the acoustic modeling becomes more sophisticated. Detailed model setup includes precise geometry definition and initial material assignments. Integration with Building Information Modeling (BIM) becomes crucial, requiring careful coordination between acoustic requirements and other building systems. Initial performance predictions help validate design directions and identify potential challenges early. Value engineering options are explored to optimize cost-effectiveness while maintaining acoustic goals.

**Design Development** The design development phase involves refined acoustic simulations with comprehensive analysis of room responses across different frequencies. Material specifications evolve from general requirements to specific product selections, including detailed performance data and installation requirements. System integration becomes a primary focus, ensuring that mechanical, electrical, and structural elements work in harmony with acoustic design elements. Performance optimization utilizes iterative analysis to fine-tune design solutions.

**Construction Documentation** During the documentation phase, final acoustic performance verification ensures that all design elements meet the required criteria. Detail development focuses on constructability and proper implementation of acoustic elements. Specifications are refined to include precise requirements for products, installation, and testing. Construction sequencing considers the timing and protection of acoustic elements during the building process.

## **5.2 Communication and Documentation**

Effective communication of acoustic design intent and requirements is essential for project success. Client communication requires translating complex acoustic concepts into accessible presentations using visual tools and clear performance metrics. This includes developing compelling cost-benefit analyses that demonstrate the value of acoustic investments and presenting realistic assessments of technical risks and mitigation strategies.

Technical documentation must be comprehensive and precise, detailing simulation methodologies and input parameters used in the acoustic modeling process. Results analysis should provide clear interpretations of performance predictions and their implications for the design. Implementation recommendations need to address both construction requirements and long-term maintenance considerations.

## **6. Case Studies in Acoustic Design for University Lecture Halls**

### **6.1 Case Study 1: Integration of Acoustic Design in New Construction**

#### *Faculty of Law Auditorium, Ain Shams University*

The development of the new Faculty of Law auditorium at Ain Shams University presented a unique challenge in acoustic design integration. Following the destruction of the original auditorium in a 1992 earthquake, the university faced the task of creating a modern lecture space that could accommodate over 2,000 students while maintaining optimal acoustic conditions. The project was particularly challenging as acoustic consultation began only after the basic construction was completed.

The auditorium's location in the heart of Cairo added significant complexity to the acoustic design. Situated between two existing buildings and overlooking a busy street, the space was subject to considerable external noise. The architectural requirements for natural ventilation and lighting, while environmentally conscious, created additional acoustic challenges. Large windows, comprising 38% of the wall surface area, served as major points of noise ingress.

#### *Design Solutions and Implementation*

The acoustic design team developed an innovative solution centred around a carefully engineered suspended ceiling system. This modification reduced the room's volume by 22% while maintaining appropriate proportions for sound distribution. The ceiling design incorporated both reflective and absorptive surfaces, strategically placed to create optimal acoustic conditions throughout the space.

The material selection and placement were crucial to the project's success. The team installed fiberglass panels with a density of 72 kg/m<sup>3</sup> and thickness of 5cm, covering these with perforated panels that balanced acoustic performance with aesthetic requirements. The wall treatments included membrane absorbers specifically designed to manage low-frequency sound - a common problem in large lecture spaces.

One of the most innovative aspects of the design was the treatment of the space above the suspended ceiling. By applying rock wool treatment in this zone, the team effectively eliminated the potential for unwanted acoustic coupling between the main space and the void above, preventing the creation of undesirable acoustic effects that could have compromised speech intelligibility.

### *Performance Outcomes*

Post-implementation measurements revealed remarkable improvements in acoustic performance. The reverberation time (T20-EOC) achieved values close to optimal, particularly in the crucial mid and high-frequency ranges that are most important for speech intelligibility. The spatial distribution of sound proved exceptionally uniform, with measured LAeq values around 81 dB(A) and a standard deviation of only 2 dB(A) - an impressive achievement for a space of this size.

Speech intelligibility measurements showed consistently good results, with D50 values falling within the acceptable range and STI values reaching 0.49 even in unoccupied conditions. These results indicated that the space would perform even better during actual use, as occupancy typically improves acoustic absorption characteristics.

## **6.2 Case Study 2: Acoustic Renovation of Existing Lecture Halls**

### *Engineering Faculty, Helwan University*

The renovation project at Helwan University's Engineering Faculty focused on improving acoustic conditions in two of its largest lecture spaces: Room C in the Civil Engineering department and the main auditorium (Room RAZ). These spaces represented different challenges in acoustic renovation, with distinct architectural configurations and usage patterns.

### ***Initial Assessment and Challenges***

Room C, with its square shape and diagonal seating arrangement, presented unique acoustic challenges. The original configuration left 31% of the audience area in acoustic shadow zones, severely compromising speech intelligibility for many students. Technical measurements revealed reverberation times more than double the optimal values, while background noise levels reached NC-55, far exceeding acceptable standards for educational spaces.

The larger Room RAZ, despite its more conventional trapezoidal shape, suffered from similar issues but at a larger scale. Its volume of 2,266 m<sup>3</sup> and capacity for 607 students created challenges in maintaining consistent sound quality throughout the space. Initial assessments found that 22% of the audience area received inadequate early reflections, crucial for speech comprehension.

### ***Renovation Strategy***

The renovation approach focused on three key areas: surface treatment, ceiling modification, and noise control. The team developed a comprehensive solution using mineral wool insulation combined with perforated plywood covering, creating an effective acoustic treatment that maintained the professional appearance required of a university setting.

The ceiling modifications proved particularly effective in both spaces. By reshaping the ceiling planes and incorporating a mix of absorptive and reflective surfaces, the team eliminated most of the acoustic shadow zones while enhancing the distribution of early reflections throughout the seating areas. This approach significantly improved speech intelligibility without compromising the overall acoustic energy in the space.

### ***Results and Impact***

The renovation produced dramatic improvements in both spaces. Room C's reverberation time aligned with optimal values across all frequency ranges, while STI measurements moved into the "Good" range. The clarity index (C50) showed improvement of more than 2 dB, a significant enhancement in speech intelligibility.

### **6.3 Lessons for Future Projects**

These case studies highlight several crucial principles for acoustic design in educational spaces. First, they demonstrate that effective acoustic treatment requires a careful balance between absorption and useful reflections. The projects also showed that strategic placement of acoustic materials often proves more important than total coverage area.

Perhaps most significantly, both cases emphasized the critical role of early reflection control in achieving good speech intelligibility. The success of these projects in dramatically improving acoustic conditions while working within existing architectural constraints provides valuable insights for future renovation projects in similar educational settings.

## **7. Future Trends and Technologies**

The convergence of Artificial Intelligence, Building Information Modeling (BIM), and acoustic simulation is revolutionizing architectural acoustics. Machine learning algorithms are now capable of analyzing vast databases of acoustic measurements to predict room behavior with unprecedented accuracy. These AI systems learn from thousands of existing spaces, identifying patterns and relationships that traditional modeling methods might miss.

BIM integration has transformed from simple geometry exchange to deep, bidirectional data flow. Acoustic parameters are now embedded directly within BIM elements, allowing real-time analysis as designs evolve. Modern BIM platforms can automatically identify acoustic challenges, suggest material modifications, and validate performance criteria against project requirements.

Cloud-based acoustic simulation platforms leverage distributed computing to process complex calculations that once took days in mere minutes. These platforms integrate seamlessly with BIM workflows, enabling acoustic analysis to become an integral part of the iterative design process rather than a post-design verification step.

## **8. Conclusions and Future Directions**

The integration of AI and BIM in acoustic modeling represents a paradigm shift in architectural acoustics. Key developments include:

**AI-Driven Design Optimization** Artificial Intelligence now powers generative design tools that can propose and evaluate thousands of acoustic solutions automatically. These systems consider multiple variables simultaneously - from material properties to construction costs - while maintaining architectural intent and spatial requirements.

**Digital Twin Integration** BIM models are evolving into acoustic digital twins, providing real-time performance data and predictive maintenance capabilities. These digital replicas enable facilities managers to monitor acoustic conditions continuously and anticipate potential issues before they become problematic.

**Automated Documentation and Compliance** AI systems integrated with BIM platforms can automatically generate acoustic documentation, verify compliance with standards, and update specifications as designs evolve. This automation reduces errors and ensures consistency across project deliverables.

Looking ahead, several emerging trends warrant attention:

**Adaptive Machine Learning Models** Next-generation acoustic simulation tools will utilize adaptive ML models that can learn from post-occupancy evaluations, continuously improving their prediction accuracy. These systems will bridge the gap between simulated and actual acoustic performance.

**Immersive Design Tools** Virtual and augmented reality platforms, powered by AI and integrated with BIM, will enable designers and clients to experience acoustic conditions in real-time as design changes are made. This immediate feedback loop will revolutionize the decision-making process.

**Smart Building Integration** The integration of acoustic modeling with smart building systems will enable dynamic optimization of acoustic environments based on actual usage patterns and occupant preferences, all managed through the BIM platform.

Recommendations for implementation include:

1. Development of standardized AI training datasets for acoustic prediction
2. Integration of acoustic performance metrics into BIM standards
3. Investment in cloud infrastructure for distributed acoustic analysis
4. Establishment of validation protocols for AI-driven acoustic predictions
5. Creation of frameworks for sharing acoustic performance data across projects

Future research should focus on:

- Development of AI models capable of predicting subjective acoustic experiences
- Integration of acoustic simulation with other building performance analyses through unified BIM platforms
- Creation of automated optimization algorithms that balance acoustic performance with other design constraints
- Validation methodologies for AI-powered acoustic predictions across different building typologies

The fusion of AI and BIM is not just changing the tools we use - it's fundamentally transforming how we approach acoustic design, making it more integrated, intelligent, and responsive to human needs.

## References

1. Airoidi, L. and Ruzzene, M. (2011) 'Design of tunable acoustic metamaterials through periodic arrays of resonant shunted piezos'. Available at: <https://doi.org/10.1088/1367-2630/13/11/113010>.
2. Ando, Y. and Raichel, D.R. (1998) 'Architectural Acoustics: Blending Sound Sources, Sound Fields, and Listeners'. Available at: <https://doi.org/10.1121/1.423953>.
3. Cox, T.J., D'Antonio, P. and Schroeder, M.R. (2005) 'Acoustic Absorbers and Diffusers, Theory, design and application'. Available at: <https://doi.org/10.1121/1.1928891>.
4. Eldakdoky, S. and Elkhateeb, A. (2017) 'Acoustic improvement on two lecture auditoria: Simulation and experiment'. Available at: <https://doi.org/10.1016/j.foar.2016.11.002>.
5. Elkhateeb, A. (2012) 'The acoustical design of the new lecture auditorium, Faculty of Law, Ain Shams University'. Available at: <https://doi.org/10.1016/j.asej.2012.04.005>.
6. Funkhouser, T. et al. (1998) 'A beam tracing approach to acoustic modeling for interactive virtual environments'. Available at: <https://doi.org/10.1145/280814.280818>.
7. Ge, H. et al. (2017) 'Breaking the barriers: advances in acoustic functional materials'. Available at: <https://doi.org/10.1093/nsr/nwx154>.
8. Jabłońska, J., Trocka-Leszczyńska, E. and Tarczewski, R. (2015) 'Sound and Architecture – Mutual Influence'. Available at: <https://doi.org/10.1016/j.egypro.2015.11.110>.
9. Li, B. et al. (2017) 'Acoustic Modeling for Google Home'. Available at: <https://doi.org/10.21437/interspeech.2017-234>.



10. Lu, Q. et al. (2022) 'Perspective: Acoustic Metamaterials in Future Engineering'. Available at: <https://doi.org/10.1016/j.eng.2022.04.020>.
11. Othman, A.R. et al. (2016) 'The Importance of Acoustic Design in the Mosques towards the Worshipers' Comfort'. Available at: <https://doi.org/10.1016/j.sbspro.2016.10.218>.
12. Pierce, A.D. and Saunders, H. (1984) 'Acoustics: An Introduction to Its Physical Principles and Applications'. Available at: <https://doi.org/10.1115/1.3269197>.
13. Savioja, L. and Svensson, U.P. (2015) 'Overview of geometrical room acoustic modeling techniques'. Available at: <https://doi.org/10.1121/1.4926438>.
14. Takenaka, T. and Okabe, A. (2013) 'A Computational Method for Integrating Parametric Origami Design and Acoustic Engineering'. Available at: <https://doi.org/10.52842/conf.ecaade.2013.2.289>.
15. Torresin, S. et al. (2019) 'Acoustic Design Criteria in Naturally Ventilated Residential Buildings: New Research Perspectives by Applying the Indoor Soundscape Approach'. Available at: <https://doi.org/10.3390/app9245401>.
16. Toyoda, M. and Takahashi, D. (2009) 'Prediction for architectural structure-borne sound by the finite-difference time-domain method'. Available at: <https://doi.org/10.1250/ast.30.265>.
17. Watson, A. and Keating, D.L. (1999) 'Architecture and sound: an acoustic analysis of megalithic monuments in prehistoric Britain'. Available at: <https://doi.org/10.1017/s0003598x00088281>.
18. Yörükoğlu, P.N.D. and Kang, J. (2016) 'Analysing Sound Environment and Architectural Characteristics of Libraries through Indoor Soundscape Framework'. Available at: <https://doi.org/10.1515/aoa-2016-0020>.

19. Zhang, X., Qu, Z. and Wang, H. (2020) 'Engineering Acoustic Metamaterials for Sound Absorption: From Uniform to Gradient Structures'. Available at:  
<https://doi.org/10.1016/j.isci.2020.101110>.